COMPACT
UNDERMOUNT
SLIDES

Fulterer®

Legend on the inside.

LEGEND

load capacity

length range (drawer)

material

lifetime (cycle tested)

board thickness

Visit us at fulterer.com

BUILT ON EXPERIENCE.
DESIGNED FOR MOTION.

Seventy years of tradition and experience in the manufacture of drawer slide systems form the foundation for each of our new products. Our COMPACT undermount slide system is no exception, representing the embodiment of our expertise in the heavy-duty sector as well as our technical know-how. The result is a combination of power, elegance, and perfect handling.

Compact FC 3040
for applications up to 100 lbs (45 kg)

- dynamic load capacity: 100 lbs (45 kg)
- full extension
- Soft Close or Push to Open
- drawer lengths ranging from 11 to 21 in (279 bis 533 mm)
- for 5/8 and 3/4 in (16 and 19 mm) board thicknesses
- works for Face Frame and Frameless

Compact FC 3060
for applications up to 130 lbs (60 kg)

- dynamic load capacity: 130 lbs (60 kg)
- full extension
- Soft Close or Push to Open
- drawer lengths ranging from 18 to 27 in (457 bis 686 mm)
- for 5/8 and 3/4 in (16 and 19 mm) board thicknesses
- works for Face Frame and Frameless

PERFECTLY ALIGNED

The front clip allows for quick and precise alignment of the drawer. Depending on the model, adjustment options up to 4D+ are available, including height, side, depth, length, and tilt adjustments.

SYNCHRONIZED FOR SMOOTH OPERATION

The precise synchronization of the extension components ensures smooth operation, high stability, and reliable performance even under heavy loads.

COMPACT.

FC

UNDERMOUNT SLIDES

35 years ago COMPACT 2000 from FULTERER was one of the first undermount slides on the market. With great excitement we like to announce our new COMPACT 3000.

Our customers will tell you, the FULTERER brand is known for innovation, quality, function and affordable price.

The Compact FC product line covers a range from 11 to 27 in (279 to 686 mm). ECD and Push to Open slides with up to 4D+ adjustments and and a load capacity of up to 130 lbs (60 kg).

UNDERSTANDING PRODUCT NAMES

The COMPACT 3000 product names follow a clear system.

Each abbreviation stands for a specific feature. This allows you to identify the most important properties of a product at a glance.

Product Line — Adjustments

FC 3040 S 4D+

FULTERER COMPACT — Damper Type

Damper Types:

Synchronized with Soft Close	S
Push to Open	SP
Works for Face Frame (FF) and Frameless (FL)	F

Adjustments:

4 dimensional adjustment	4D
3 dimensional adjustment	3D
Tilt adjustment	+

FC 3040 F S 4D+

Face Frame Full Extension
Undermount Slide with Soft Close (ECD)

4D+ ECD

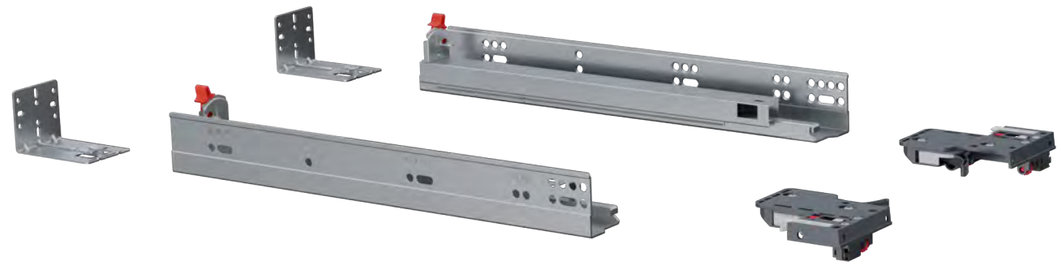

Specifications

- dynamic up to 100 lbs / 45 kg
- 11 to 21 in / 279 to 533 mm
- 50,000 cycles lifetime
- steel, galvanized
- 5/8 in / 16 mm

Characteristics

- Function Type: synchronized, soft close
- Damper Type: adjustable
- Trigger Type: soft trigger

Adjustments

- **4D Front Clip:** height, side, length, depth
- **+Tilt:** rear height

FC 3041 F S 4D+

Face Frame Full Extension
Undermount Slide with Soft Close (ECD)

4D+ ECD

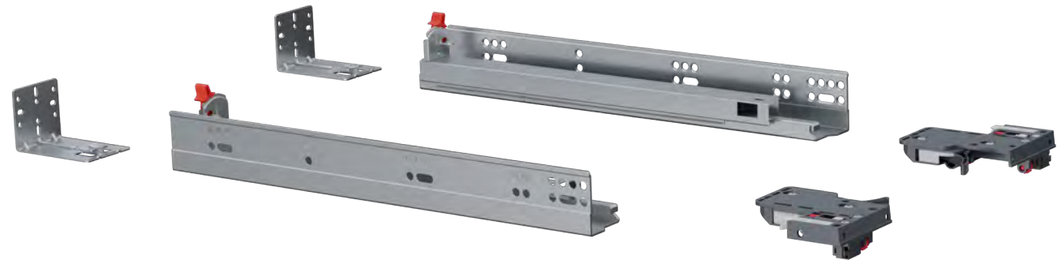

Specifications

- dynamic up to 100 lbs / 45 kg
- 11 to 21 in / 279 to 533 mm
- 50,000 cycles lifetime
- steel, galvanized
- 3/4 in / 19 mm

Characteristics

- Function Type: synchronized, soft close
- Damper Type: adjustable
- Trigger Type: soft trigger

Adjustments

- **4D Front Clip:** height, side, length, depth
- **+Tilt:** rear height

FC 3040 F SP 3D+

Face Frame Full Extension
Undermount Slide with Push to Open

3D+ PTO

Specifications

- dynamic up to 100 lbs / 45 kg
- 11 to 21 in / 279 to 533 mm
- 50,000 cycles lifetime
- steel, galvanized
- 5/8 in / 16 mm

Characteristics

- Function Type: synchronized, push to open
- Damper Type: non-adjustable
- Trigger Type: regular

Adjustments

- **3D Front Clip:** height, side, length
- **+Tilt:** rear height

FC 3041 F SP 3D+

Face Frame Full Extension
Undermount Slide with Push to Open

3D+ PTO

Specifications

- dynamic up to 100 lbs / 45 kg
- 11 to 21 in / 279 to 533 mm
- 50,000 cycles lifetime
- steel, galvanized
- 3/4 in / 19 mm

Characteristics

- Function Type: synchronized, push to open
- Damper Type: non-adjustable
- Trigger Type: regular

Adjustments

- **3D Front Clip:** height, side, length
- **+Tilt:** rear height

FC 3060 F S 4D

Face Frame Heavy-Duty Full Extension
Undermount Slide with Soft Close (ECD)

4D ECD

Specifications

- dynamic up to 130 lbs / 60 kg
- 18 to 27 in / 457 to 686 mm
- 50,000 cycles lifetime
- steel, galvanized
- 5/8 in / 16 mm

Characteristics

- Function Type: synchronized, soft close
- Damper Type: adjustable
- Trigger Type: soft trigger

Adjustments

- **4D Front Clip:** height, side, length, depth

FC 3061 F S 4D

Face Frame Heavy-Duty Full Extension
Undermount Slide with Soft Close (ECD)

4D ECD

Specifications

- dynamic up to 130 lbs / 60 kg
- 18 to 27 in / 457 to 686 mm
- 50,000 cycles lifetime
- steel, galvanized
- 3/4 in / 19 mm

Characteristics

- Function Type: synchronized, soft close
- Damper Type: adjustable
- Trigger Type: soft trigger

Adjustments

- **4D Front Clip:** height, side, length, depth

FC 3060 F SP 3D

Face Frame Heavy-Duty Full Extension Undermount Slide with Push to Open

3D PTO

Specifications

- dynamic up to 130 lbs / 60 kg
- 18 to 27 in / 457 to 686 mm
- 50,000 cycles lifetime
- steel, galvanized
- 5/8 in / 16 mm

Characteristics

- Function Type: synchronized, push to open
- Damper Type: non-adjustable
- Trigger Type: regular

Adjustments

- **3D Front Clip:** height, side, length

FC 3061 F SP 3D

Face Frame Heavy-Duty Full Extension Undermount Slide with Push to Open

3D PTO

Specifications

- dynamic up to 130 lbs / 60 kg
- 18 to 27 in / 457 to 686 mm
- 50,000 cycles lifetime
- steel, galvanized
- 3/4 in / 19 mm

Characteristics

- Function Type: synchronized, push to open
- Damper Type: non-adjustable
- Trigger Type: regular

Adjustments

- **3D Front Clip:** height, side, length

ENGINEERED FOR PRECISE INSTALLATION
FROM CONSTRUCTION TO FINAL ADJUSTMENT

INSTALLATION & ADJUSTMENTS

Slide Mounting Specifications

Standard mounting dimensions and a defined 5/32 in (4 mm) setback make planning and installation easy. The first four mounting holes are identical on all COMPACT models.

Drawer Box Specifications

Standardized design dimensions for 5/8 in (16 mm) and 3/4 in (19 mm) board thicknesses ensure easy installation and reliable operation of all COMPACT undermount slide systems.

Drawer Back Preparation

Predefined drilling and milling dimensions allow for quick machining of the drawer back panel. Precise preparation ensures a secure connection to the undermount slide system.

Adjustments

With adjustment options up to 4D+, drawers can be aligned quickly and precisely. The result is uniform joints and perfect front alignment.

Slide Mounting Specifications

Side View

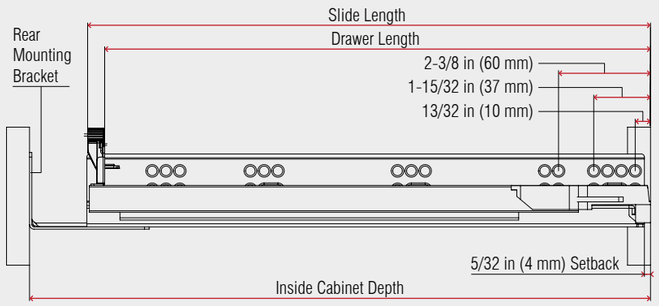

Slide Close-Up



Drawer Box Specifications

Front View

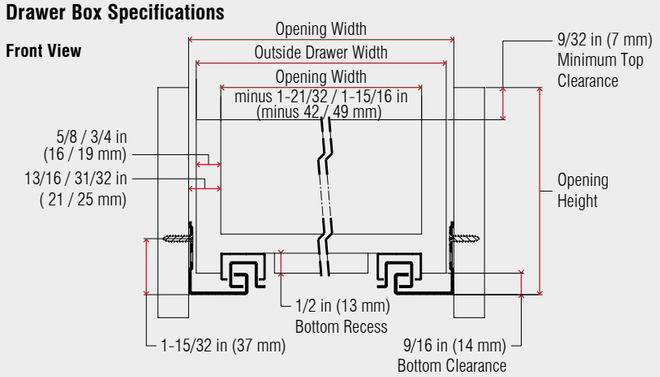

Drawer Back Preparation

Rear View



Adjustments

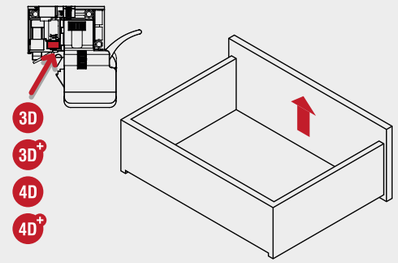

Height +3 mm

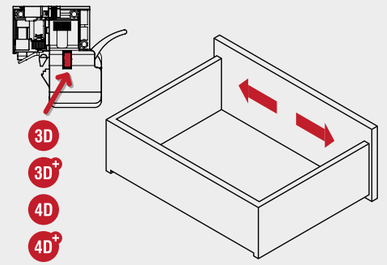

Side ±2 mm

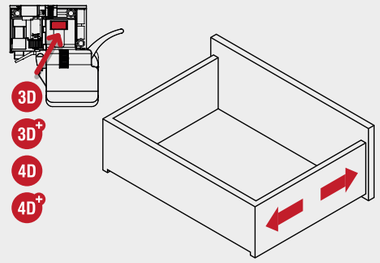

Length ±2 mm

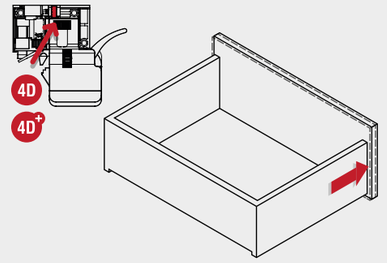

Depth +3 mm

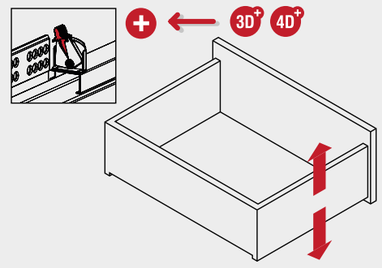

Rear Height +4 mm

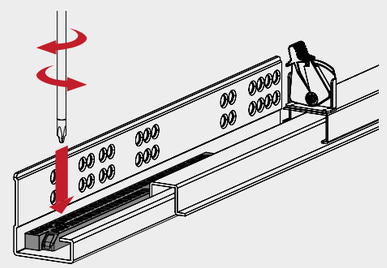

+25 % stronger damper force (optional)

FULTERER USA

FULTERER USA, INC.
542 Townsend Avenue
High Point, NC 27263-4552
USA
T +1 336 431 4646
orders@fultererusa.com
www.fultererusa.com

FULTERER USA, INC.
1900 Proforma Avenue, Unit F-2
Ontario, CA 91761
USA
T +1 909 947 0407
orders@fultererusa.com
www.fultererusa.com

FULTERER WORLDWIDE

FULTERER AG
Industriestrasse 35
9430 St. Margrethen
SWITZERLAND
T +41 71 747 61 61
info@fulterer.com
www.fulterer.com

FULTERER GMBH
Höchster Strasse 11
Postfach 1
6890 Lustenau
AUSTRIA
T +43 5577 8130
info@fulterer.com
www.fulterer.com

FULTERER MÉXICO S. DE R.L. DE C.V
Av. Morelos 26-28
CP 06040 Ciudad de México
MEXICO
T +52 55 2345 3248
mexico@fulterer.com
www.fulterer.com

FULTERER BRASIL EIRELI
Avenida Sete de Setembro 5011,
Cj. 802 | Água Verde
80250-205 Curitiba/PR
BRAZIL
T +55 41 99263 5066
brasil@fulterer.com
www.fulterer.com

FULTERER GUANGZHOU TRADING CO., LTD.
101 of Workshop, Building 1,
No.13 Shinan Road,
Dongchong Town
Nansha District, Guangzhou City
PEOPLES REPUBLIC OF CHINA
T +86 20 3136 0424
china@fulterer.com
www.fulterer.com

Fulterer®

9710013495