X

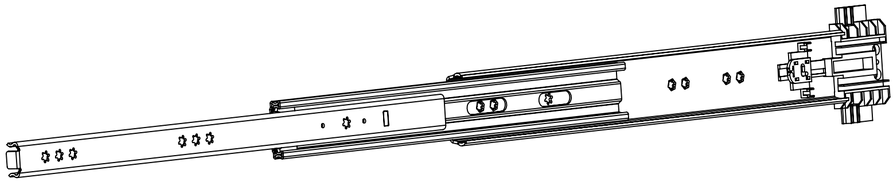

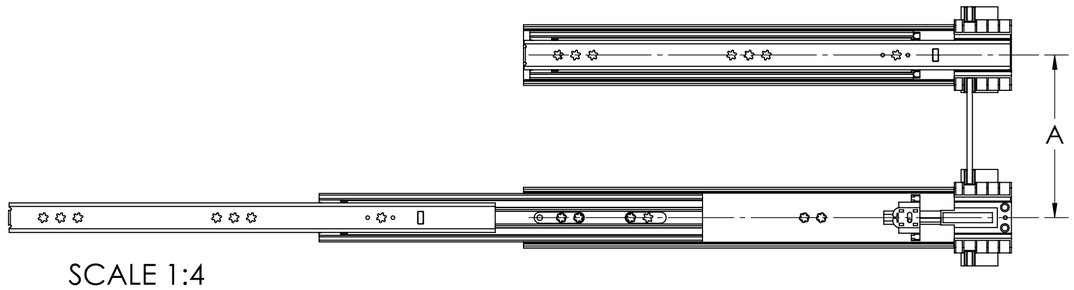

SCALE 1:4

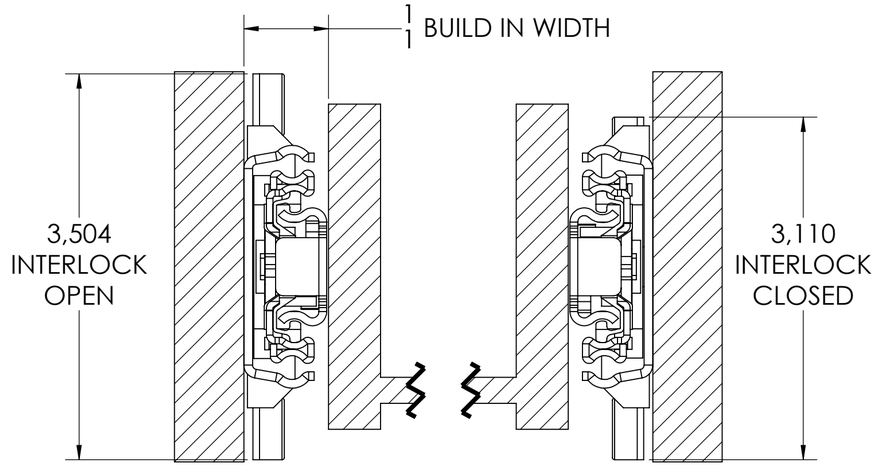

SCALE 1:1

NOTE: 450mm LENGTH SHOWN

RECOMMENDED MINIMUM DISTANCE BETWEEN SLIDES "A" = 4,3307"





ROD LENGTH L = A-2.071"
If there are more than three drawers, then:
plus tolerance = +0.035"/(Number of drawers)
minus tolerance = -0.078"/(Number of drawers)

Diameter of ROD: ∅0.197"
FULTERER PART NUMBER 400246

Adjustable Rod Length (L)
1. A≥ 3.386"
2. L^{+1}_{-1}=A-2.071"

Diameter of ROD: ∅0.197"

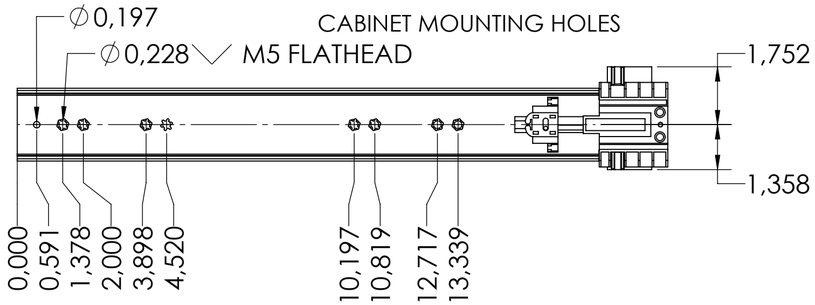

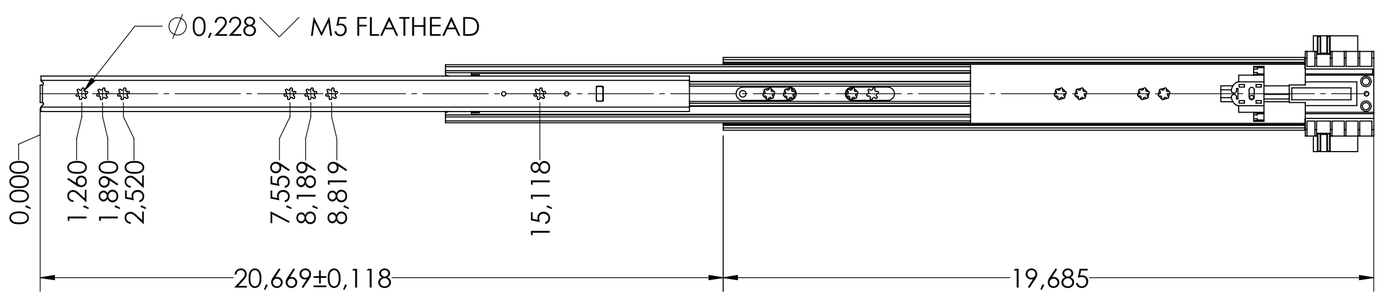

RECOMMENDED HARDWARE:

CABINET- M5 FLAT HEAD SCREW

DRAWER- M5 FLAT HEAD SCREW

INTERLOCK ∅5mm ROD FULTERER PART NUMBER 400246

X

XX = test dimension, next free test number ?? ??

all dimensions in inch

missing dimensions see 3D ⌭ = theor. intersection	DIN ISO 128-30	scale: **3:10**	surface/color: **zinc plated**
released			

ind.	changes	date	name

	date	name
drawn	**2023-11-16**	**BM**
proven	**2025-07-08**	**BM**

Fulterer

Fulterer AG & Co KG
A-6890 Lustenau

Fulterer AG
CH-9430 St. Margrethen

material: **STEEL** (technical requirements Fulterer)

description:
SIDE MOUNT OVER EXTENSION[I]
INTERLOCK DRAWER SLIDE WITH DRAWER DISC. & SOFT CLOSE

drawing number:
5619.500-GA.T060

replaces the edition:

A2

This drawing remains our property and may not be multiplied neither be disclosed to third parties (§§1,3 and 5 from the copyright Act (UrhG)). covered according to DIN ISO 16016