X

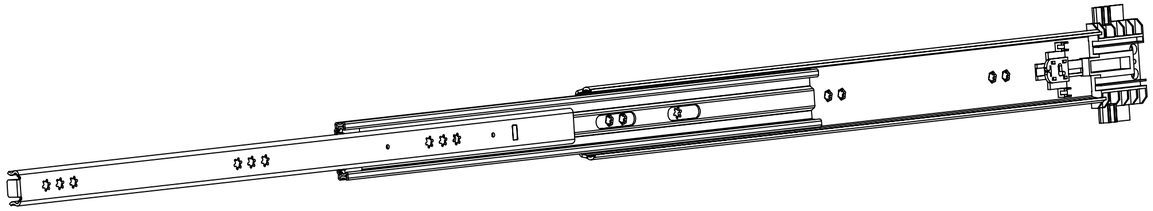

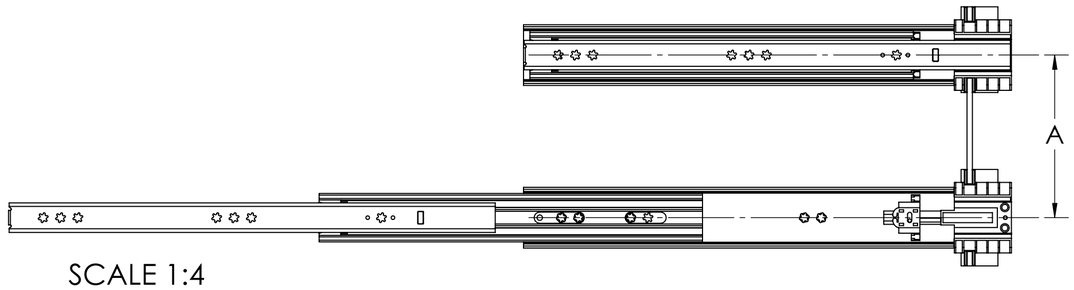

SCALE 1:4

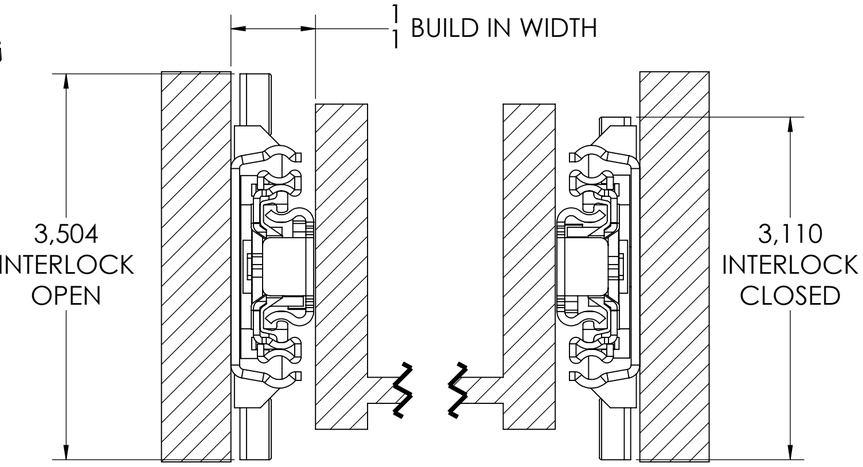

SCALE 1:1

NOTE: 450mm LENGTH SHOWN

RECOMMENDED MINIMUM DISTANCE BETWEEN SLIDES "A" = 4,3307"



ROD LENGTH L = A-2.071"
If there are more than three drawers, then:
plus tolerance = +0.035"/(Number of drawers)
minus tolerance = -0.078"/(Number of drawers)

Diameter of ROD: ∅0.197"
FULTERER PART NUMBER 400246

Adjustable Rod Length (L)
1. A≥ 3.386"
2. L^{+1}_{-1}=A-2.071"

Diameter of ROD: ∅0.197"

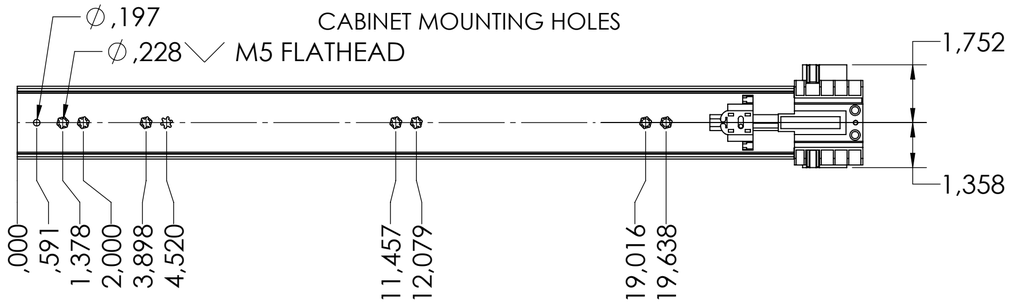

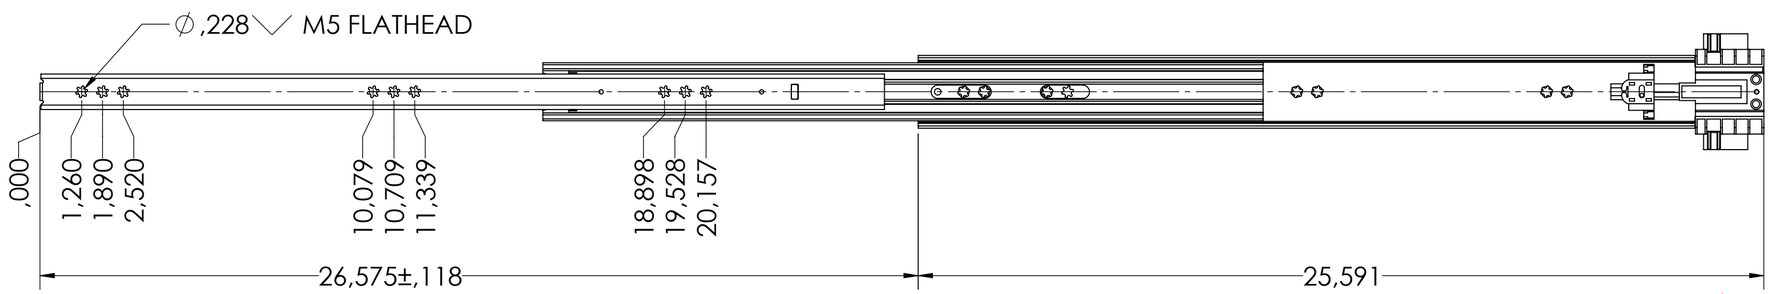

RECOMMENDED HARDWARE:

CABINET- M5 FLAT HEAD SCREW

DRAWER- M5 FLAT HEAD SCREW

INTERLOCK ∅5mm ROD FULTERER PART NUMBER 400246

X

XX = test dimension, next free test number ?? ??

all dimensions in inch					
missing dimensions see 3D = theor. intersection	DIN ISO 128-30	scale: **3:10**	surface/color: **zinc plated**	material: **STEEL**	(technical requirements Fulterer)
released				description: **SIDE MOUNT OVER EXTENSION[I]** INTERLOCK DRAWER SLIDE WITH DRAWER DISC. & SOFT CLOSE	
			drawn 2023-11-16 BM proven 2025-07-08 BM		
ind. changes	date	name	Fulterer AG & Co KG A-6890 Lustenau Fulterer AG CH-9430 St. Margrethen	drawing number: 5619.650-GA.T060	
				replaces the edition:	A2

This drawing remains our property and may not be multiplied neither be disclosed to third parties (§§1,3 and 5 from the copyright Act (UrhG)). covered according to DIN ISO 16016