







FR 796 SCC OE SMT

Over Extension Progressive Action Drawer Slide



Specifications

-  bottom mount
-  18.0 mm / 0.71 in.
-  dynamic up to 60 kg / 132 lbs.
-  solid synthetic rollers
-  stainless steel 1.4509 / 441
-  -25 °C to +80 °C
-13 °F to +176 °F


Characteristics

- high lateral stability
- integrated safety clip
- dual-sided captive profile
- synthetic stop
- self-closing
- compatible with regular extension drawer slide FR 1052 SCC SMT
- available as heat-resistant version up to +110 °C (+230 °F)
- Easy Close Device (ECD) can be ordered optionally

Mounting Type

- cabinet profile with bayonet mounting tabs and safety nose
- drawer profile without screw holes
- tool-less quick assembly of the cabinet profile

Dimensions

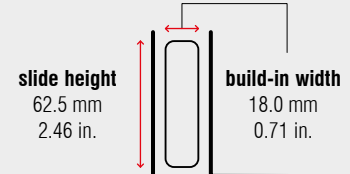

Length		Extension		Weight		Item No.	Item No.
				per set		PU 1	PU 2
mm	inch	mm	inch	kg	lbs.		
300	11.81	335	13.19	1.38	3.04	70610	70610GV
350	13.78	385	15.16	1.46	3.22	70611	70611GV
400	15.75	460	18.11	1.69	3.73	70612	70612GV
450	17.72	510	20.08	1.93	4.26	70613	70613GV
500	19.69	560	22.05	2.16	4.76	70614	70614GV
550	21.65	610	24.02	2.40	5.28	70615	70615GV
600	23.62	660	25.98	2.64	5.82	70616	70616GV
650	25.59	710	27.95	2.87	6.33	70617	70617GV
700	27.56	760	29.92	3.11	6.86	70618	70618GV
750	29.53	810	31.89	3.37	7.43	70619	70619GV

Packing Unit

PU 1 – Sets assembled per Box, all Lengths: 5

PU 2 – 50 Sets, all 6 profiles individually packaged, 10 boxes

(4 x 25 cabinet profiles LEFT/RIGHT, 4 x 25 middle profiles LEFT/RIGHT, 2 x 50 drawer profiles LEFT/RIGHT)