









Specifications

-  bottom mount
-  18.0 mm / 0.71 in.
-  dynamic up to 70 kg / 154 lbs.
-  solid synthetic rollers
-  stainless steel 1.4509 / 441
-  -25 °C to +80 °C
-13 °F to +176 °F


Characteristics

- high lateral stability
- ideal running characteristic and smoothness of running through integrated progressive action
- integrated safety clip
- dual-sided captive profile
- synthetic stop
- self-closing
- available as heat-resistant version up to +110 °C (+230 °F)
- Easy Close Device (ECD) can be ordered optionally

Mounting Type

- cabinet and drawer profile with screw holes

Dimensions

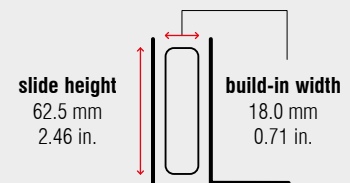

Length		Extension		Weight		Item No.	Item No.
				per set		PU 1	PU 2
mm	inch	mm	inch	kg	lbs.		
300	11.81	285	11.22	1.45	3.19	70480	70480GV
350	13.78	335	13.19	1.62	3.57	70481	70481GV
400	15.75	385	15.16	1.81	4.00	70482	70482GV
450	17.72	435	17.13	2.08	4.59	70483	70483GV
500	19.69	485	19.09	2.33	5.13	70484	70484GV
550	21.65	535	21.06	2.57	5.66	70485	70485GV
600	23.62	585	23.03	2.82	6.22	70486	70486GV
650	25.59	635	25.00	3.08	6.79	70487	70487GV
700	27.56	685	26.97	3.33	7.34	70488	70488GV
750	29.53	735	28.94	3.59	7.91	70489	70489GV

Packing Unit

PU 1 – Sets assembled per Box, all Lengths: 5

PU 2 – 50 Sets, all 6 profiles individually packaged, 10 boxes

(4 x 25 cabinet profiles LEFT/RIGHT, 4 x 25 middle profiles LEFT/RIGHT, 2 x 50 drawer profiles LEFT/RIGHT)